

Video 25 Plus Fluid head



With the Video 25 Plus fluid head and its seven-step, temperature-independent damping system, professional camera operators capture the naked truth on film with perfect clarity. Need to change position? Tilt angles up to 90° are no trouble for the Video 25 Plus, even under maximum load.

Fast, safe, reliable. The Video 25 Plus displays an 18-step counterbalance that can be adjusted easily and safely in 9 stages with our well-known dial. Fine tuning is achieved via a half step function which can either be engaged or disengaged. The Video 25 Plus 7 step damping system delivers the same outstanding performance as the proven Video 20 system. The selfilluminating Touch Bubble, which runs on conventional batteries, helps you level the camera even in poor lighting conditions.

With a maximum payload of 35 kg / 77.2 lb, the Video 25 Plus is ideally suited to HDTV and wide screen cameras. That's why a viewfinder extension bracket is included as a standard accessory.

Technical Facts


Weight	4.5 kg / 9.9 lbs
Payload	8 - 35 kg / 18 - 77 lbs
Sliding range - plate	110 mm / 4.3 in
Counterbalance	in 18 steps
Grades of drag	7 each horizontal and vertical + 0
Tilt range	+90/-75°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 16
Tripod/Pedestal fitting	150 mm bowl, integrated flat base fitting
Pan bar(s)	2, telescopic, Type Plus
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9

Payload


C.O.G.*	min. kg	max.
75 / 3"	12.4 /	48.0 /
100 / 4"	10.6 /	41.0 /
125 / 5"	9.3 /	35.7 /
150 / 6"	8.2 /	31.7 /
175 / 7"	7.4 /	28.5 /
200 / 8"	6.7 /	25.9 /
250 /	5.7 /	21.8 /
300 /	4.9 /	18.9 /



Kameraplattform
Counterbalance

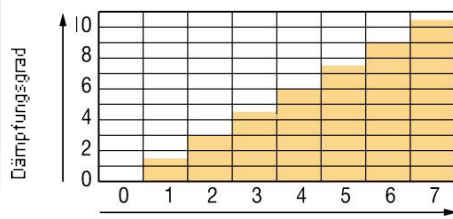

Damping

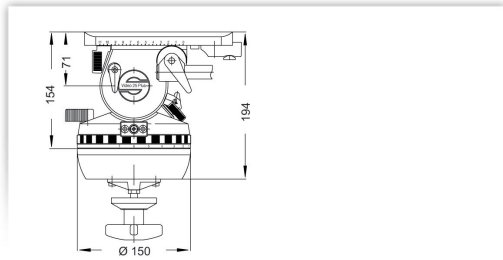

Dimensions

Further photos



Order data

Article	Order code
Video 25 Plus Fluid head	2500P

This product is also available in the following systems:

Article	Order code
System 25 EFP 2 CF	2512

Accessories



C.O.G. plate 16



Cable clamp V
60



Adapter FB/150



Front Box
Adapter



Accessory
adapter



Accessory
adapter with
clamping