

Dutch Head 35 Fluid head




The Dutch Head 35 also features Sachtler's patented fluid damping and counterbalance systems. In addition, it has a cross-sliding plate that uses a high precision dove-tailed guidance with a sliding range of 60 mm / 2.4". This enables the camera's center of gravity to be aligned exactly over the head's swiveling axis. The head is able to tilt the horizon, and features a scale on the right side panel that shows the exact degree of third axis movement.

Technical Facts


Recommended for	Fluid heads with Touch & Go® plate 35
Weight	6 kg / 13.23 lbs
Payload	up to 50 kg / 110.2 lbs
Sliding range - plate	60 mm / 2.4 in
Counterbalance	in 7 steps
Grades of drag	7 diagonal + 0
Tilt range	±60°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 35
Pan bar(s)	1, telescopic, Type Plus

Payload


C.O.G.* min. kg / max.		
75 / 3"	0 / 0	67.6 /
100 / 4"	0 / 0	58.4 /
125 / 5"	0 / 0	51.5 /
150 / 6"	0 / 0	46.0 /
175 / 7"	0 / 0	41.6 /
200 / 8"	0 / 0	37.9 /
250 /	0 / 0	32.3 /
300 /	0 / 0	28.1 /

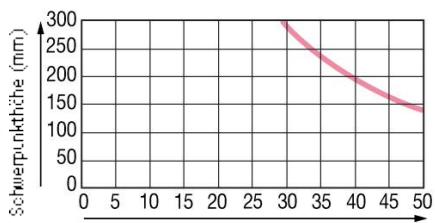

Kameraplattform
Counterbalance

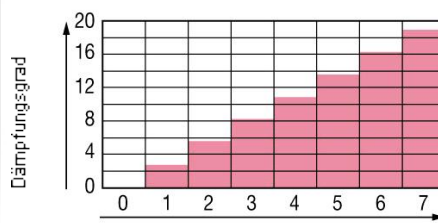

Damping

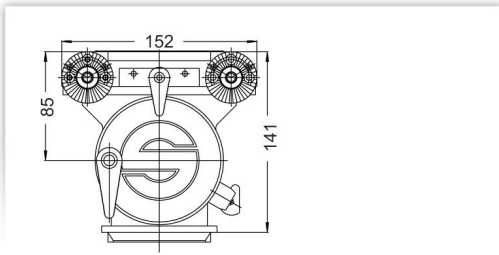

Dimensions

Further photos



Order data

Article	Order code
Dutch Head 35 Fluid head	3004

This product is also available in the following systems:

Article	Order code
---------	------------

Accessories

set your ideas in motion!