

Globalmediapro Fantail LS1

Lip Sync Corrector

Operation Manual

Table of Contents

1. Introduction.....	1
2. Applications.....	1
3. Package Contents	1
4. Features	1
5. Specifications	2
6.1 Input Audio Reference Level	2
6. Operation Controls and Functions.....	3
6.1 Top Panel.....	3
6.2 Left Panel.....	3
6.3 Right Panel.....	3
6.4 Front Panel.....	4
6.5 Rear Panel	4
7. Connection and Installation	5

1. Introduction

The L/R In-Out Lip SYNC Corrector is a compact device that corrects audio delays between audio and video. When distributing video over long distances through multiple devices like distribution amplifiers and set top boxes there can sometimes be a noticeable delay which results in audio being played before the video. This gadget lets you manually adjust the audio delay from 0 ~300 ms so you can perfectly synchronize your audio and video, so when it reaches the display your media is synched and ready to go. The Lip SYNC Corrector is an affordable and compact device that when placed beside your display greatly enhances your home audio experience.

2. Applications

- Home Theater
- Cable TV
- Set-Top-Box
- Showroom display

3. Package Contents

- Lip SYNC Corrector
- 5V / 1A Power Adaptor
- Operation Manual

4. Features

- Sample Rates 48 kHz
- Analog to analog signal bypass
- Low power consumption
- Up to 24 bit resolution

5. Specifications


Input Port	1 x L/R
Sample Frequency	48 kHz
Output Port	1 x L/R
Input Impedance	44K Ω
Output Impedance	1k Ω
Power Supply	5V / 1A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: $\pm 8kV$ (air-gap discharge) $\pm 6kV$ (contact discharge)
Dimensions(mm)	55.6 (W) x 47.5 (D) x 23.5(H)
Weight(g)	32
Chassis Material	Plastic
Silkscreen Color	White
Operating Temperature	0°C~40°C / 32°F~104°F
Storage Temperature	-20°C~60°C / -4°F~140°F
Power Consumption	0.5 W
Relative Humidity	20 ~ 90% RH (non-condensing)

5.1 Input Audio Reference Level

Input Level	Output Level	THD+N	Frequency Response	SNR	Crosstalk
2 Vrms	2.0 Vrms	<0.01%	$\pm 0.5dB$ 20Hz~20KHz	>80dB	<-70dB


6. Operation Controls and Functions

6.1 Top Panel

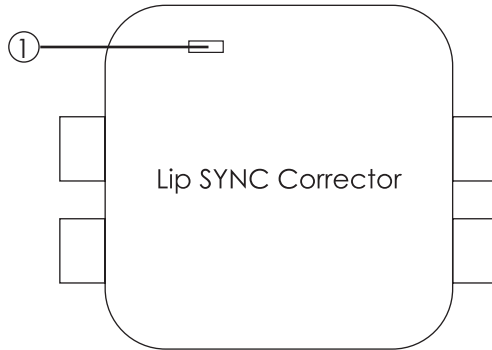


- ① POWER LED: The LED will turn blue when the power is connected.

6.2 Left Panel




- ① L/R IN: These jacks are to connect with input sources such as DVD/Blu-Ray players using stereo cables in order to receive an audio signal.

6.3 Right Panel




- ① L/R OUT: These jacks are where you connect an output stereo cable to an amplifier, speaker or TV so you can output audio.

6.4 Front Panel

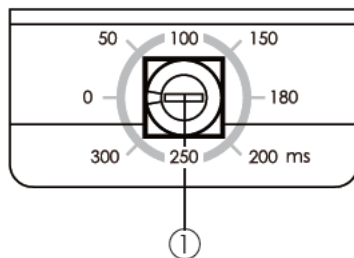

- ① Lip SYNC switch: This switch has eight settings that allow users to set the audio output delay from 0~300 milliseconds in order to have perfectly synced audio and video.

6.5 Rear Panel

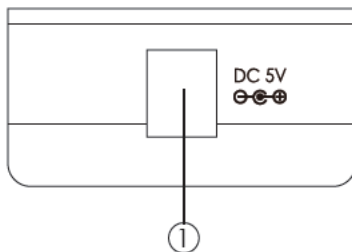

- ① DC 5V: This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to an AC outlet.

7. Connection and Installation



Set-Top-Box

or



Blu-Ray



TV