


Hidden Camera

Floodlight Camera




XPL6AZ1 ●
XPL6BZ1 ● ●

FEATURES

- > Halogen 150W / 300W lighting load capacity.
- > 140 degrees PIR motion sensor with no dead-angle wide view design.
- > Time / Lux / Sensitivity adjustment by VR.

DIMENSIONS

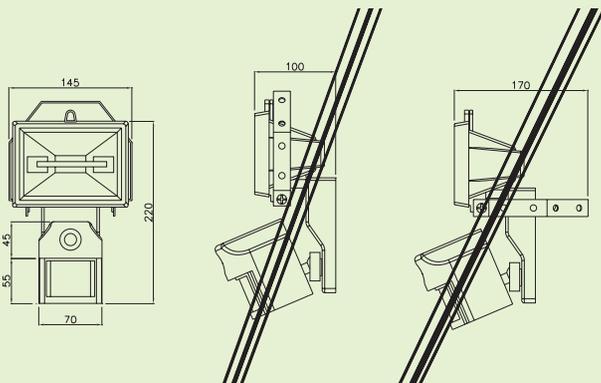

SPECIFICATIONS

Model	XPL6AZ1	XPL6BZ1
Motion Sensor Floodlight		
Voltage Requirement	AC110V - 220V Switching Power	
Lighting Load (Incandescent)	Max. 150W, J-Type 78mm	
Detection Mode	PYRO-Sensor	
Sensor Swiveling Angle	45° Vertical & Horizontal	
Suitable Mounting	Wall & Ceiling Mount	
Time Adjustment	4 Sec. ~ 12 Min., VR Adjustable	
Lux Adjustment	Day ~ Night, VR Adjustable	
Detection Range	5M ~ 12M, 140° (20°C), VR Adjustable	
Operating Temperature	-20°C~40°C	
Warm Up Time	30 Sec.	
Color CCD Camera		
Image Pick-up Device	SHARP 1/3" Color Normal Resolution	SHARP 1/3" Color High Resolution
Effective Picture Elements	NTSC: 510*492, PAL: 500*582 (H*V)	NTSC: 768*494, PAL: 752*582 (H*V)
Horizontal Resolution	380 TV lines	470 TV lines
Minimum Illumination	0.1 LUX @ F2.0	0.2 LUX @ F2.0
S/N Ratio	More than 48 dB	
Auto Electronic Shutter	NTSC: 1/60s ~ 1/100,000s, PAL: 1/50s ~ 1/110,000s	
Gamma Characteristic	0.45	
Lens Furnished	Board lens 3.6mm / F2.0 (Optional: 4.3/6.0/8.0mm)	
Gain Control	Automatically	
White Balance	Automatically (2500K ~ 9500K)	
Synchronous System	Negative Sync. Internal	
Video Output	1 Vp-p Composite Video / 75 Ohms	

Design and specifications are subject to change without notice.

CCD Camera

DVR

CCTV Lens

Accessories