

DV 12 SB Fluid head




The key to Sachtler's successful fluid heads is their step switching. Now our innovative SPEEDBALANCE technology enables even faster and finer counterbalance of your camera system. By reducing the minimum payload, the heads' overall payload range is increased.

Technical Facts


Weight	2.7 kg / 6 lbs
Payload	1 - 14 kg / 2.2 - 31 lbs
Sliding range - plate	70 mm / 2.8 in
Counterbalance	in 12 steps
Grades of drag	5 each horizontal and vertical + 0
Tilt range	+90/-75°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go® Plate 16
Tripod/Pedestal fitting	100 mm bowl, integrated flat base fitting
Pan bar(s)	1, Type DV 100
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9

Payload


C.O.G.* min. kg / max.	
75 / 3"	1.7 / 3.7 17.6 /
100 / 4"	1.4 / 3.2 14.9 /
125 / 5"	1.3 / 2.8 13.0 /
150 / 6"	1.1 / 2.4 11.5 /
175 / 7"	1.0 / 2.2 10.3 /
200 / 8"	0.9 / 2.0 9.3 /

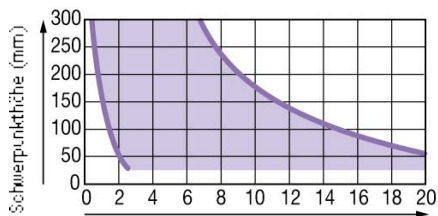

Kameraplattform
Counterbalance

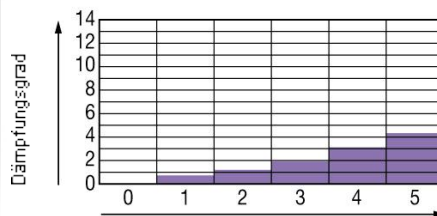

Damping

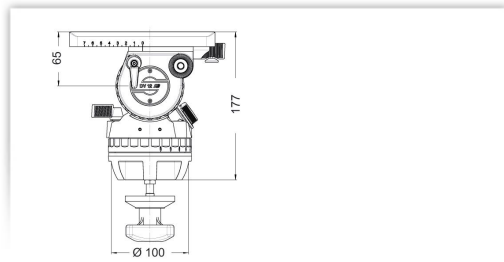

Dimensions

Further photos



Order data

Article	Order code
DV 12 SB Fluid head	1205

This product is also available in the following systems:

Article	Order code
System 12 SB	1260
System 12 SB ENG 2 CF	1262
System 12 SB ENG 2 MCF	1263
System 12 SB SL MCF	1265

Accessories



C.O.G. plate 16



Adapter FB/100



Adapter Ped C
I/DV



Adapter 100/150



Multi Disc



Pan bar DV left
(telescopic)



Adapter
viewfinder
extension 12/15



Accessory
adapter



Accessory
adapter with
clamping