

Reporter 8LED On-camera LED light



In designing Reporter 8LED, Sachtler's new LED on-camera light, special emphasis was placed on durability, compactness and flexibility. The Reporter 8LED offers input voltage from 6 to 24 volts, making it ideal for use with a range of camera from small 7.2 volt (H)DV cameras to commonly-used broadcast camcorders. The luminaire deploys all the advantages of the latest LED technology: energy efficiency, the exceptionally long life of the LED chip, an extremely low failure rate, and minimal heat generation.

A rigid, waterproof aluminium housing allows use of the Reporter 8LED in extreme shooting situations. The user can apply three different accessory sets to provide a wide range of light design solutions. The fixture can be also used as a small location light by placing it on a mounting base or on a mini croco clamp.


Reporter 8LED is available in a daylight version. An exchangeable LED module makes it a simple matter to convert to a tungsten light. The luminaire's standard flood optic lens can easily be exchanged for a medium optic lens after detaching the 4-leaf barndoor frame with quick-release mechanism.

Key features:


- Robust, unbreakable, waterproof, compact, small and light-weight
- Aluminium housing allows for fast heat dissipation
- Usage of one LED module (no multiple shadows)
- "Works with SOOM" product

Technical Facts

Weight	400 g / 0.88 lbs (luminaire body without accessories)
Dimensions	80 mm / 3.1" long, 52 x 52 mm / 2.05" x 2.05" section without barndoors
Storage Temperature	-40° C to +60° C / -40° F to +120° F
Operating temperature	-25° C to +40° C / -13° F to +104° F
Protective class	IP 44
Power	8 W
Light output	250 lm
Mount Type	Double joined bracket with camera shoe and 1/4" screw
Input voltage	6 to 24 V
Electrical protection	Inverse polarity protection and over / low voltage indication

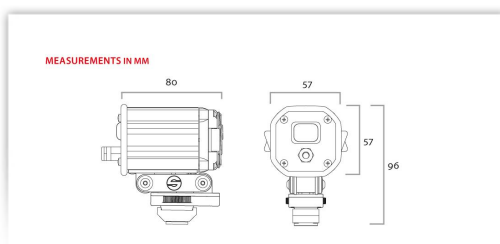


Dimensions

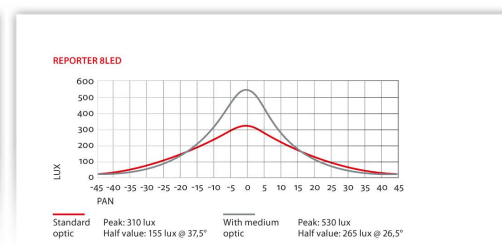

Flood & Spot

Further photos



Order data

Article	Order code
Reporter 8LED On-camera LED light	S2401-0001

This product is also available in the following systems:

Article	Order code
---------	------------

Accessories



LED Module
Tungsten



Diffusor



Optic Lens
Medium



Gel frame



Extension Cable
A/B Power Tap



Adapter cable
A/B Power Tap -
PowerPlug
connector



Adapter Cable
A/B Power Tap -
XLR, 4-pin



Car Adapter A/B
Power Tap



Mini Croco
Clamp



Socket 16 mm



Extension Arm



Mounting Base



Mains Power
Adapter with
EU / UK / US
Adapter



Handle 2



Forward adapter



FSB CELL



Belt-Pack® 12V /
4.5Ah

set your ideas in motion!