

Coaxial Cabling : Video Distributor & Video Amplifier Series

ITEM NO.: CD816A 8 Input 16 Output Video Distribution Amplifier


CD816A is video distribution Amplifier. 8 input , 16 output, each channel with 2 output. Each output built in Brightness and Sharpness adjustment. It takes 1U Of space in standard 19" Rack. It's suitable for far distance, different floor in a building or different electrical field.



Features:

- Wide bandwidth, video gain compensation amplification.
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable).
- Red LED: power on/off.
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

View of Installation:

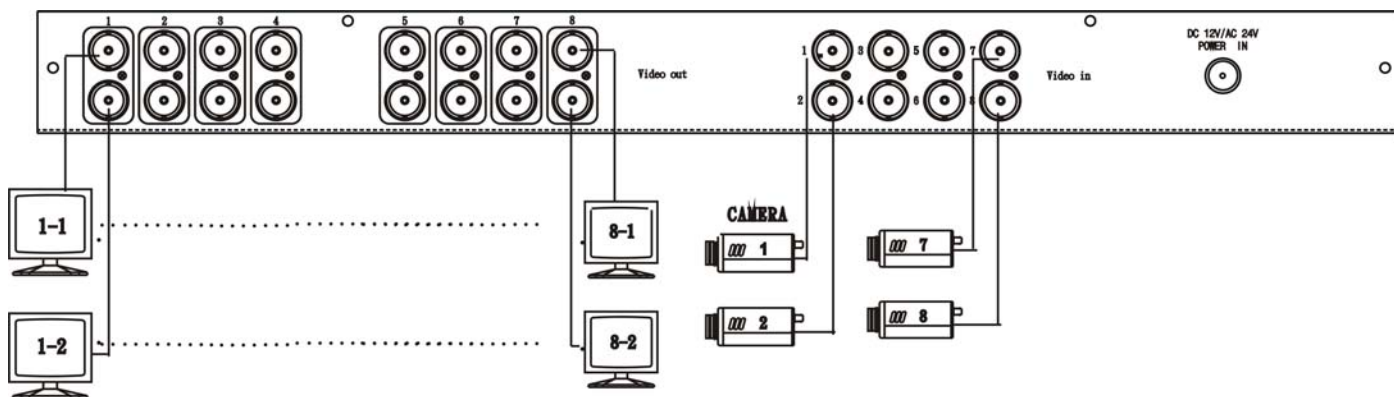

Specifications:

ITEM NO.	CD816A
Video Input Channel	8
Video Output Channel	16
Video Input Level	0.8~1.2Vp-p, 75 Ohms
Video Output Level	1Vp-p (Standard), 75 Ohms
Video Bandwidth	10hz - 10MHz
Power Supply	DC12V 500mA / AC24V
Power Consumption	250mA
Dimensions W x H x D mm	483x191x44 (1U height)
Weight g	2300
Material	Metal Black

