

Coaxial Cabling : Video Distributor & Video Amplifier Series

ITEM NO.: CD1632A 16 Input 32 Output Video Distribution Amplifier


CD1632A is video distribution Amplifier. 16 input , 32 output, each channel with 2 output. Each output built in Brightness and Sharpness adjustment. It takes 2U (3.5 inch) Of space in standard 19" Rack. It's suitable for far distance, different floor in a building or different electrical field.



Features:

- Wide bandwidth, video gain compensation amplification.
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable).
- Red LED: power on/off.
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

View of Installation:

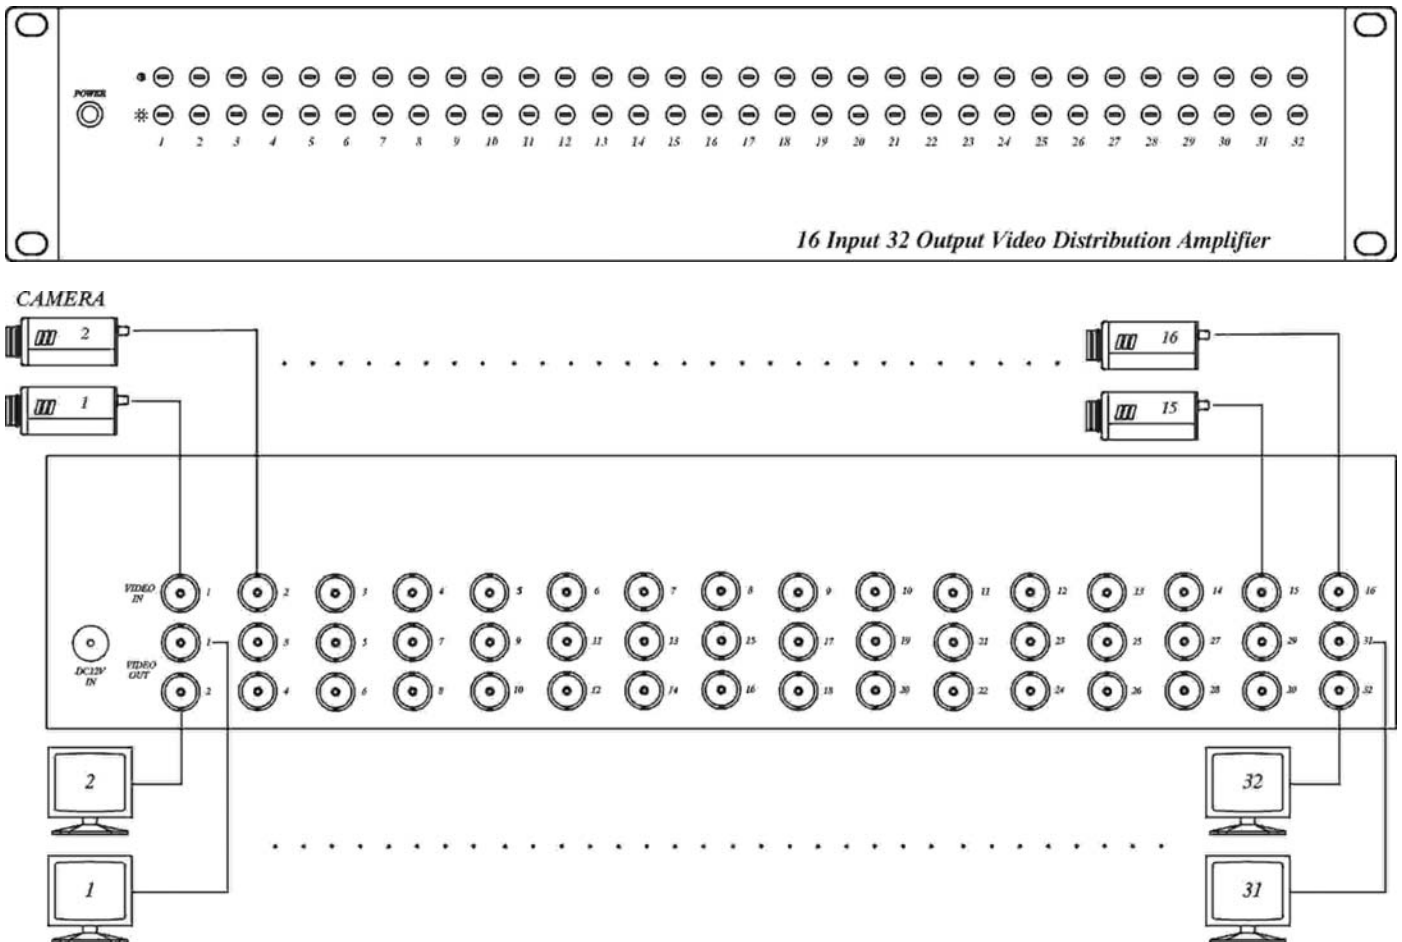

Specifications:

Item NO.	CD1632A
Video Input Channel	16
Video Output Channel	32
Video Input Level	0.8~1.2Vp-p, 75 Ohms
Video Bandwidth	10hz - 10MHz
Power Supply	DC12V/1200mA (Regulated)
Power Consumption	800mA
Brightness	V
Sharpness	V
Storage Temperature	0 ~80 °C
Operation Temperature	0~ 40 °C
Dimensions W x H x D mm	483x62x88.4mm (2U height)
Weight g	1600
Material	Metal Black

RoHS   