


Long Range Twisted Pair Transmission System – Auto Gain Active Series

ITEM NO.: TTA111VT

- UTP active transmitter, to work with auto gain active receiver TTA111VHA, TPA016A/TPA016HA distance up to 2KM.
- Built in L, M, and H high frequency video gain.
- Built in transient protection and ground lifting, damaging voltage spike problems are eliminated.
- Green LED: Power on / off.

Panel view & Function:

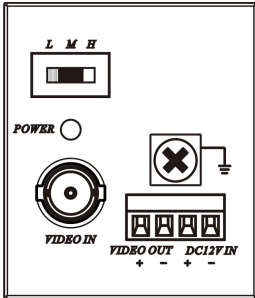


LED Indication:

Green: ON / Power on

Slide Dip Switch for Video Gain :

- | | | |
|---|---------------------|--------|
| L | High frequency gain | - 6 dB |
| M | High frequency gain | +3 dB |
| H | High frequency gain | +6 dB |

Installation View:

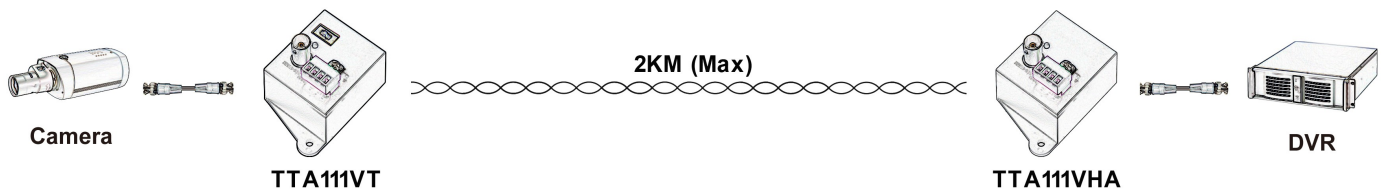

Trouble Shooting :

The unit built in transient protection, please make sure to make grounding.

Specification:

ITEM NO.	TTA111VT
Video Format	NTSC / PAL
Video Input	BNC x 1 (75 Ω , 1 Vp-p)
Video Output	4 pin removable terminal x 1 (100 Ω , 3 Vp-p)
Switch	Slide switch x 1
Power Supply	DC 12V 500mA
Power Consumption	75 mA (Max)
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95%
DIMENSIONS W x H x D mm	43.2 x 45.2 x 74
WEIGHT g	55

RoHS   

Rev. C