

Professional SDI Monitor


Globalmediapro T-SS15



Special Features

- Special Video Processor
- 3G-SDI In/Out
- Build-in 2W speaker
- Support IR remote controller
- VESA standard bracket 75/100mm
- Aluminum Panel Frame, Metal Case

Monitor Connection

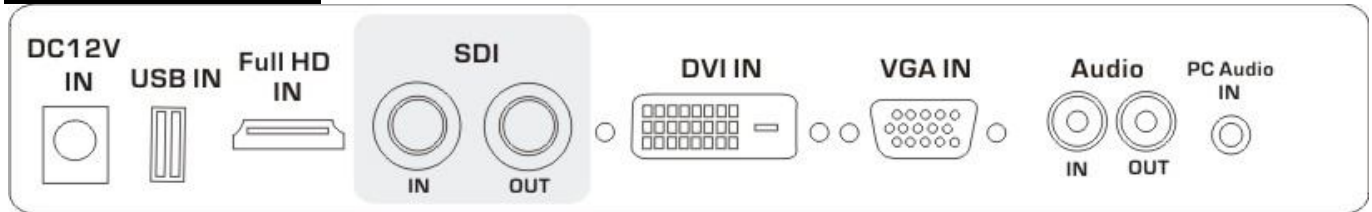

Technical Specifications

Monitor model	T-SS15
LCD panel	15.6"
Visible area (mm)	344.1x 193.5
Picture format	16: 9
Max. resolution	1920x1080
Pixel dot pitch (mm)	0.17925 x 0.17925
Colours	262K
Brightness	300 cd/m ² [LED]
Contrast	600 :1
Response time(Tr/Tf)	3/8 ms
View angle (U/D/L/R)	60/60/70/70
Video input/output	1x /1x SDI (BNC)
Full HD input	1x Full HD (A Type)
Audio input(R/L)	2x (RCA)
PC input	1x VGA input (D-Sub 15 pin) 1x DVI-D input
Earphone out	1xPhone jack ,3.5ψ
Speaker	2x built-in speaker (2 watt)
SDI standards	3G-SDI[SMPTE 424M] HD-SDI[SMPTM 292M] SD-SDI[SMPTE 259M]
SDI Video support	[3G] 1080P50/60(4:2:2) [HD]720P@50/60Hz,1080i@50/60Hz 1080p25/30Hz [SD]NTSC/60Hz,PAL/50Hz
SDI Video bandwidth	2.97Gpbs&2.975/1.001Gpbs
SDI Cable Transmission	3G-SDI[100Meter],HD-SDI[200Meter],SD-SDI[300Meter] _(5C2V orRG6Cable)
OSD setting	Yes
Power input	AC 100-240V 50/60Hz, Adapter DC 12V/5A
Power consumption	Approx. 12 watt
Dimensions (WxHxD) mm	401.5x 251 x60.3
Weight	3.2kg
Operating temperature	0° to 40° C

Subject to technical changes without prior notice