

# HD-SDI Dome Camera

## Full HD, 24 IR

### DMC-2024PMC


#### ◆ Picture



#### ◆ Feature

- 1/3" PS-Panasonic CMOS
- Full HD 2.2 Megapixel (1080p) Display
- Low up to 0.001Lux with Sens-Up(8x), LED On: 0Lux
- Motion Detection, Privacy Masking(32), Day/Night, Digital Zoom(96x)
- DNR (Digital Noise Reduction), Defog, OSD
- Max. Transmission distance (200m) via coaxial cable(5CHFBT)
- SMPTE 292M(HD-SDI)
- 3.6mm Fixed Mega Pixel Lens
- Built-In High Effective IR 24 EA (Visible Distance: 15M)
- 3Axis, Indoor Type

#### ◆ Dimensions

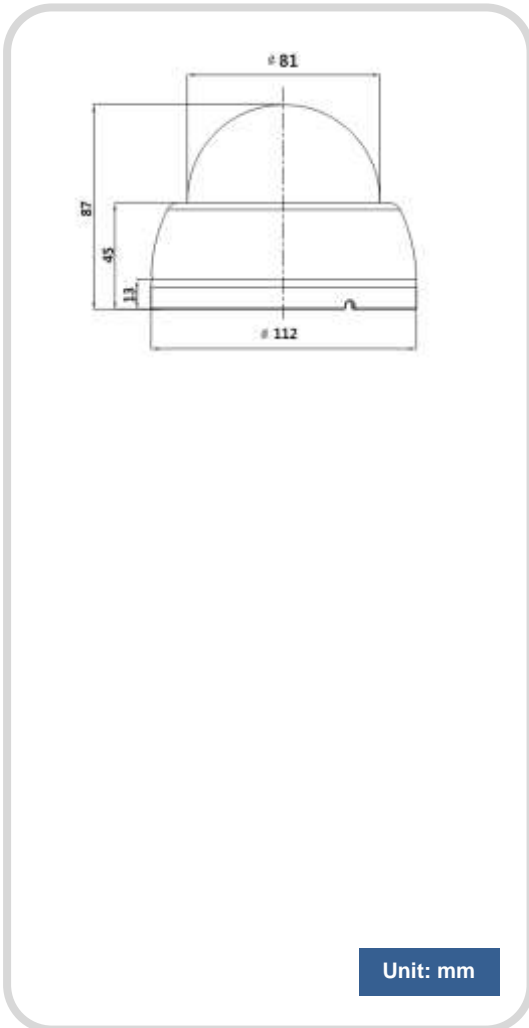

#### ◆ Specifications

MODEL	DMC-2024PMC
<b>Video</b>	
Image Sensor	1/3" 2.2 Mega(1080p) Panasonic CMOS
Scan mode	Progressive Scan
Total number of pixels	2010(H) x 1108 (V), 2.2M
Number of active pixels	1944(H) x 1092 (V)
Resolution	1,100 TVL
Minimum illumination	0.001Lux with Sense-up(8x)
Video Output	HD-SDI, SMPTE-292M
S/N Ratio	More than 50dB (AGC Off)
<b>Lens</b>	
Lens	3.6mm Varifocal Mega Pixel Lens
Iris	Electric Iris
<b>Function</b>	
Day & Night	Auto / Day / BW / EXT(1~2)
White Balance	Auto / Auto-ext / Push / Manual
AGC	Level Setting(1~10)
DNR	Off / Low / Middle / High
Privacy / Motion	32 Zones / 1 Zone
Mirror / Flip	Off / On
Brightness	Level (1~20)
Shutter	Auto/Manual(1/30~1/60000)
Back light	WDR/D-WDR/BLC
<b>IR LED</b>	
LEDs	24 LEDs (850nm)
Visible Distance	15m
<b>Environment</b>	
Operating Humidity	30 % ~ 90 % RH
Operating Temp.	- 10°C to 50°
<b>Electrical</b>	
Power Consumption	Max 3.5W
Power Supply	DC12V±10, Dual Type: AC24/DC12V(Optional)
<b>Mechanical</b>	
Construction	Plastic body ,PC bubble
Dimension	87mm(H) X 81Ø
Weight	About 0.34Kg